




Pluma principal		Giro 360° (La unidad de elevación de esta tabla es de kg)					
Trabajar Amplitud (m)		Cilindro I extendido al 100 %, estabilizadores totalmente extendidos, contrapeso de 10.5 t					
		12,1	16,5	21,0	27,5	34,0	40,5
2,5		90000*					
3,0		85000*	55000				
3,5		75000	55000	43500			
4,0		67500	53000	43500			
4,5		62500	51000	43000	31000		
5,0		57000	49000	41500	31000		
5,5		52400	48000	40000	30000		
6,0		47500	46500	38000	29000	23000	
7,0		40000	39500	33800	27000	22000	
8,0		33500	33000	30000	24500	20500	16500
9,0		26000	26000	25000	22500	19000	15500
10,0			21400	20500	20300	17500	14500
11,0			17700	17500	17800	16000	13500
12,0			14700	14500	15000	14800	12500
14,0				10600	11300	11800	10800
16,0				7900	8600	9500	9200
18,0					6700	7600	7800
20,0					5200	6100	6400
22,0					4000	5000	5300
24,0						3900	4500
26,0						3100	3500
28,0						2500	2800
30,0							2200
32,0							1800
34,0							1300
36,0							1400
38,0							1100
40,0							
I	0	4.4	8.9	8.9	8.9	8.9	8.9
II	0	0	0	6.5	13	19.5	26
Multiplica	12	10	8	6	5	4	3
Gancho		90 t					

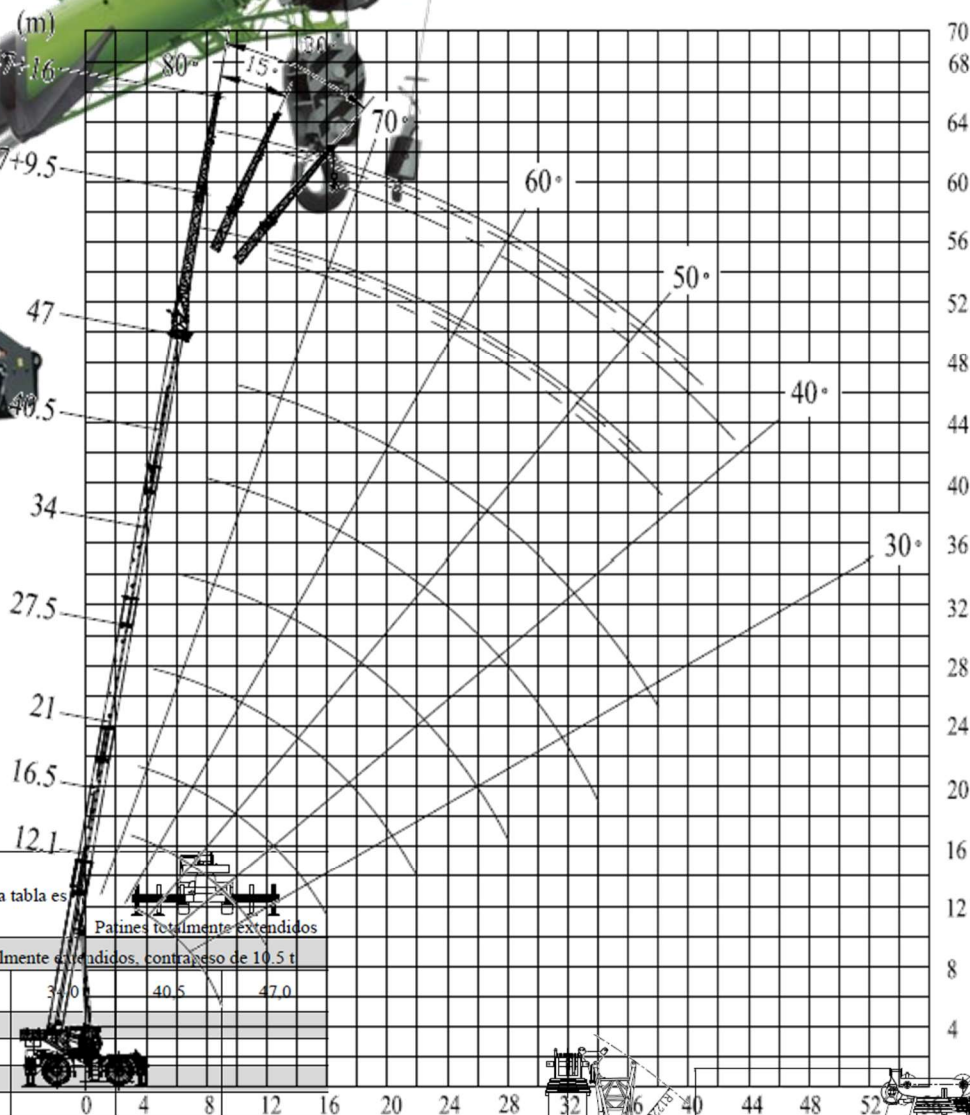